

**Data sheet**


Drawing No. : 1010473

Page 1 / 1

created: SBR 17/12/2015 08:41:00

**Typ : A47055025038**

**RoHSCompliant**

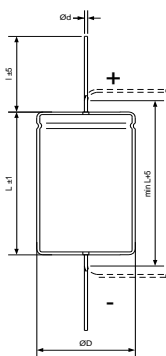

$\varnothing$  D : 25 mm  
 L : 38 mm  
 l : 45 mm  
 d : 0,8 mm

Terminals : Wire

**Electrical Parameters**

Rated Capacitance ( $C_R$ ) @ 100 Hz / 20 °C	<b>47</b> $\mu$ F	
Tolerance	$\pm$ <b>20</b> %	
Rated Voltage ( $U_R$ )	<b>550</b> V	
Surge Voltage ( $U_S$ ) max. 5 x 1 min / h	<b>580</b> V	
Reverse Voltage ( $U_U$ ) max. 1 s	<b>2</b> V	
Leakage Current ( $I_L$ ) @ $U_R$ / 5 min / 20 °C	<b>156</b> $\mu$ A	
ESR typ. @ 100 Hz / 20°C	<b>2709</b> m $\Omega$	
Tan $\delta$ typ. @ 100 Hz / 20°C	<b>8</b> %	
Z max. @ 10 kHz / 20°C	<b>2167</b> m $\Omega$	
ESL typ.	<b>20</b> nH	
Rated Ripple Current ( $I_R$ ) @ 100 Hz / 85 °C	<b>0,3</b> A	
Useful life @ $I_R$ , $U_R$ , 85 °C	<b>5000</b> h	
IEC Climatic category / Standards	<b>40/085/56</b>	<b>IEC 60384-4</b>
Applications	Industrial	
Your article No. / Project		